


# HYDRAULIC WIRELINE ANNULAR VALVE

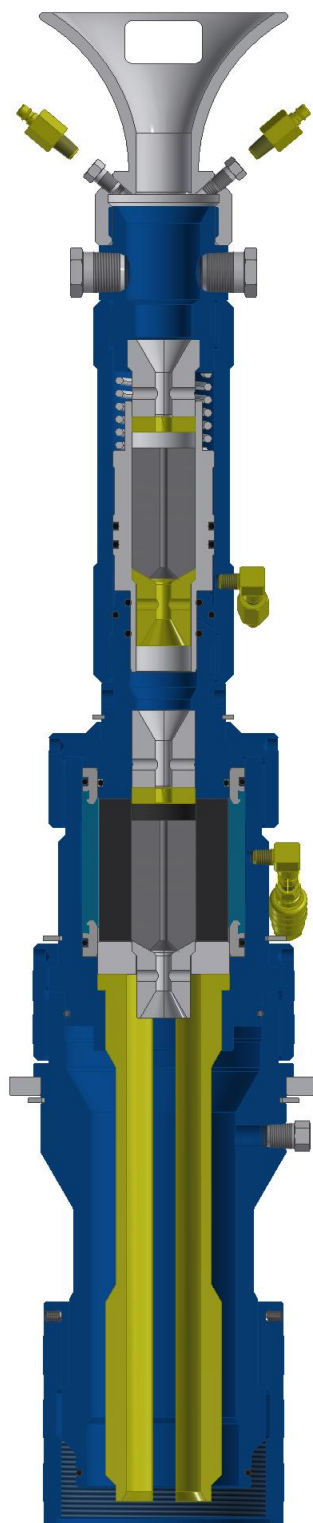

**HYDRAULIC WIRELINE ANNULAR VALVE**

The RMZ Hydraulic Wireline Annular Valve is designed to seal on a static cable under pressure and is recommended for “Safety while Logging” applications and for perforating with large guns.

Positioned above the drilling BOP, or a “Shooting Nipple”, it offers, once rigged up, a clean bore of 6” to 6 1/2” (depending on connection type) to run a tool through. The cable and rope socket are connected to the head before passage through the main assembly.

The RMZ Hydraulic Wireline Annular Valve seals by squeezing a split rubber element which is wrapped around the wire. This element seals on the cable outer armour against well pressure, as well as wiping the wire free of fluid.

A hydraulic hand pump is required to operate the pack-off.

### Features:

- Compact design.
- Quick union bottom connection.
- Hydraulic operated sealing elements.

### Benefits

- Compactable for all wire size with minimum changes.
- Easily re-dressable.

### Optional

- Available with all standard quick union, flange and Hammer union connection.
- Pressure rating available for 5,000 psi, 10,000 psi and 15,000 psi.
- Available for sour and standard service.
- Customizable to meet customer requirement.

### Technical details for equipment ordering:

- Connection, wire size.
- Pressuring Rating, Service, Temperature Class, Product Specification Level.

### NOTE:

1. All surface pressure control equipment is manufactured and certified to API6A, SI1996/913 and NACE MR-01-75 (for H2S rated equipment). This equipment comes with full certification / Documentation, Operational / maintenance Procedure, Aluminium thread protectors and is painted to client colour specification.

### Technical Specification

CONNECTION	PRESSURE RATING (PSI)	WIRE SIZE	SVC	P/N
6.875"-4AC (5.625") PIN & CLR	5000	1/2"	H2S	990052923